



Built to Last...

AMERICAN PNEUMATIC TOOLS

Quick-reference Product Guide

Paving Breakers

Features

- automatic valve
- drop forged alloy steel handle
- built-in automatic oiler
- rubber handle grips
- latch type retainer
- swivel hose connection
- standard universal air fitting
- noise dampening muffler available
- four-bolt backhead
- replaceable chuck bushing (except for model 140/140A)

Model 117 - 30 lb. class

Model 140 - 40 lb. class

Model 160 - 60 lb. class

Model 190 - 90 lb. class


Airgo-Line® option available in 40 lb., 60 lb., 90 lb. classes

- vibration dampening ergonomic handle decreases shock to the operator
- handle is interchangeable with APT standard model
- delivers same hitting power as the standard breaker, reduces operator fatigue
- replaceable vibration isolator

Airgo-Line®
backhead assembly



Model	Assy. No.
140A	18034
160A	17684
190A	17720

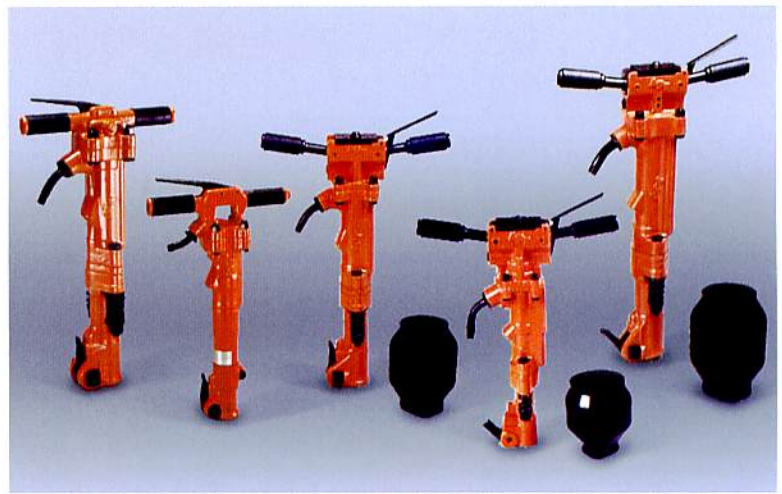

Model	Chuck Size	Bore	Stroke	B.P.M.	CFM @90PSI	Weight lbs.	Length in.	Air Inlet NPT
117	7/8 x 3-1/4 • 1 x 4-1/4	1-3/4	3-3/8	1850	34-48	33	21-3/4	3/8 male
140	1 x 4-1/4	1-7/8	4-1/4	1500	48	43	21-1/8	1/2 male
160	1-1/8 x 6 • 1-1 x 4-1/4	2-1/4	4-1/8	1680	60-65	68	25-3/4	1/2 male
190	1-1/8 x 6 • 1-1 x 4-1/4	2-5/8	6-1/8	1350	75-80	91	29	3/4 male
140A*	1 x 4-1/4	1-7/8	4-1/4	1500	48	46	24	1/2 male
160A*	1-1/8 x 6 • 1-1 x 4-1/4	2-1/4	4-1/8	1680	60-65	70	28-1/4	1/2 male
190A*	1-1/8 x 6 • 1-1 x 4-1/4	2-5/8	6-1/8	1350	75-80	90	31	3/4 male

* Airgo-Line



Model	Chuck Size	Bore	Stroke	B.P.M.	CFM @90 PSI	Weight lbs.	Length in.	Air Inlet NPT
109	3/4 x 3-3/4 • Round Slotted	1-1/4	1	3400	19-21	9	15	3/8 female
115	7/8 x 3-1/4	1-15/16	1-3/8	2900	32-36	19	18-3/8	3/8 male
137*	7/8 x 3-1/4 or 4-1/4 • 1 x 4-1/4	2-3/8	2-5/8	2300	85-90	38	19-3/4	1/2 male
155	7/8 x 3-1/4 or 4-1/4 • 1 x 4-1/4	2-5/8	3	2100	110-120	61	22-3/8	3/4 male

*No Oil Reservoir

Rock Drills

Features

Model 109 - 9 lb. class

- clockwise rotation
- stop-rotation feature
- light-weight aluminum cast handle
- built-in automatic oiler

Model 115 - 15 lb. class

- stop rotation feature
- counter clockwise rotation
- built-in automatic oiler
- latch type retainer
- light-weight aluminum cast handle

Model 137 - 30 lb. class

- 4 drilling speeds
- replaceable piston stem bearing
- available wet or dry
- counter clockwise rotation
- rubber handle grips

Model 155 - 60 lb. class

- 3 drilling speeds
- replaceable piston stem bearing
- built-in automatic oiler
- available wet or dry
- counter clockwise rotation
- rubber handle grips

Clay/Trench Diggers

Features

- deep case-hardened alloy steel cylinders
- replaceable chuck bushing
- latch-type retainer

Model 118 Clay Digger

- built-in automatic oiler
- D-style handle
- inside trigger for better control and safety
- automatic valve

Model 119 Trench Digger

- built-in automatic oiler
- T-style forged handle
- rubber handle grips
- automatic valve

Model 125 Clay Digger

- D-style handle
- inside trigger for better control and safety
- flapper valve design allows dirt to pass without stopping tool
- replaceable chuck and piston stem bushing



Model	Chuck Size	Bore	Stroke	B.P.M.	CFM @90PSI	Weight lbs.	Length in.	Air Inlet NPT
118	7/8 x 3-1/4 • 1 x 4-1/4	1-3/4	3-3/8	1850	34-36	31	22-1/2	3/8 male
119	7/8 x 3-1/4 • 1 x 4-1/4	1-3/4	3-3/8	1850	34-38	37	31	1/2 female
125	7/8 hex x 3-1/4	1-11/16	2-3/4	2120	38-42	21	18-3/8	1/2 female

Backfill Tamper

Features

Model 131

- built-in large automatic oiler
- flapper valve design allows dirt to pass without stopping the tool
- internally-reinforced large malleable iron butt (standard)
- pole butt (half-moon), and 3" diameter butts available



Model	131
Bore	1-1/2
Stroke	5-1/2
B.P.M.	670
CFM @90PSI	38-42
Weight lbs.	37
Length in.	51-7/8
Air Inlet NPT	1/2 female



Rivet Busters

Features

- ½" screened bushing helps minimize debris consumption; enables whip-hose connection
- deep case-hardened alloy steel cylinder
- uses jumbo extra heavy duty tool steel
- heavy duty upper and lower sleeves
- adjustable exhaust deflector
- teflon throttle valve
- price includes whip hose assembly: 6' whip hose, hose barb swivel, universal air fitting

Model 633

- 6" stroke
- drop forged D-style handle
- inside trigger for better control and safety

Model 133/Model 1133

- 8" stroke/11" stroke
- drop forged D-style handle
- inside trigger for better control and safety

Model 1433*

- 14" stroke
- drop forged D-style handle
- inside trigger for better control and safety
- innovative lightweight cylinder design

*Special orders of 25 or more only.

Model	Bore	Stroke	B.P.M.	CFM @90PSI	Weight lbs.	Length in.	Air Inlet NPT
633	1-3/16	6	1100	42-46	24	20-5/8	1/2 female
133	1-3/16	8	1140	42-46	30	22-1/2	1/2 female
1133	1-3/16	11	850	48-52	33	25-1/2	1/2 female
1433	1-3/16	14	600	49-53	34	28-5/8	1/2 female

Chipping Hammers

Features

- NEW ½" screened bushing helps minimize debris consumption; enables whip-hose connection
- deep case-hardened alloy steel cylinders
- drop-forged handles
- replaceable bushing
- adjustable exhaust deflector
- price includes oval retainer, locking spring, and whip hose assembly - 6' whip hose, hose barb swivel, universal air fitting

Chipper accessories



Retainers

Part #	Description
18290	Bolt-on quick change / ball retainer - optional
5550	Quick change/ball-type retainer - optional
9431	Retainer with spring (7022 with 1941) - standard



Model 260 Series

- 2-bolt handle for ease of maintenance
- patented ball valve - more forgiving of dirt and debris, easier to maintain, made from corrosion resistant material
- available in 3" and 4" strokes

Model 650 Series

- flapper valve design allows dirt to pass without stopping the tool
- traditional pistol grip handle
- available in 2", 3" and 4" strokes



	Model	Bore	Stroke	B.P.M.	CFM @90PSI	Weight-lbs. w/o retainer	Length-in. w/o retainer	Chuck Bushing	Air Inlet
650 Series	652	1-1/8	2	2100	32-34	12	13-1/4	.680 round or .580 hex	1/2 NPT
	653	1-1/8	3	1650	33-35	14	15-1/4	.680 round or .580 hex	1/2 NPT
	654	1-1/8	4	1375	34-36	16	16	.680 round or .580 hex	1/2 NPT
260 Series New 2-bolt design	263	1-1/8	3	1650	33-35	14	14-9/16	.680 round or .580 hex	1/2 NPT
	264	1-1/8	4	1375	34-36	15	15-9/16	.680 round or .580 hex	1/2 NPT



Needle Scaler Kit

Model 317 (7" Needles)

- Kit Includes:**
- needle scaler
 - 3 chisels
 - 7" needles
 - housing
 - carrying case

Needle Scalers

Features

Model 307

- rubber-faced throttle valve for positive seal
- lever-type throttle for easy control
- alloy steel cylinder
- attachment with set of 19, 7" steel needles
- Optional accessories sold separately.



Mini-scaler

Model 121

Part Number	18568
B.P.M.	4500
CFM @90 PSI	5.5
Weight	4 lbs.
Length*	11-¾ in.

Model	B.P.M.	CFM @90PSI	Weight lbs.	Length* in.	Air Inlet NPT
Scaler with 7" needles					
307	4,000	7	6.7	18-1/2	1/4 female

*includes needles



ACCESSORIES

WHIP HOSES

Needle Sealers

18743 WHIP HOSE ASSEMBLY (univ. + OL + 6' hose (3/8" HSE) + 1/4 NPT male)

Rivet Busters

16891 (Recommended) WHIP HOSE ASSEMBLY (univ.+ 1L + 6' hose + 1/2 NPT swivel)

16892 (Optional) WHIP HOSE ASSEMBLY (univ.+ 2L + 6' hose + 1/2 NPT swivel)

9266 (Optional) WHIP HOSE ASSEMBLY (univ.+ 6' hose + 1/2 NPT swivel)

Chipping Hammers

16891 (Recommended) WHIP HOSE ASSEMBLY (univ.+ 1L + 6' hose + 1/2 NPT swivel)

9266 (Optional) WHIP HOSE ASSEMBLY (univ.+ 6' hose + 1/2 NPT swivel)

109 Rock Drill

16896 (Recommended) WHIP HOSE ASSEMBLY (univ.+ 1L + 6' hose + 3/8 NPT male)

16894 (Optional) WHIP HOSE ASSEMBLY (univ.+ 6' hose + 3/8 NPT male)

115 Rock Drill

16897 (Recommended) WHIP HOSE ASSEMBLY (univ.+ 1L + 6' hose + 3/8 NPT female)

16895 (Optional) WHIP HOSE ASSEMBLY (univ.+ 6' hose + 3/8 NPT female)

131 Backfill Tamper

16893 (Recommended) WHIP HOSE ASSEMBLY (univ.+ 2L + 6' hose + 1/2 NPT male)

16889 (Optional) WHIP HOSE ASSEMBLY (univ.+ 6' hose + 1/2 NPT male)

119 Trench Digger

16893 (Recommended) WHIP HOSE ASSEMBLY (univ.+ 2L + 6' hose + 1/2 NPT male)

16889 (Optional) WHIP HOSE ASSEMBLY (univ.+ 6' hose + 1/2 NPT male)

118 Clay Digger & 117 Paving Breaker

16897 (Recommended) WHIP HOSE ASSEMBLY (univ.+ 1L + 6' hose + 3/8 NPT female)

16895 (Optional) WHIP HOSE ASSEMBLY (univ.+ 6' hose + 3/8 NPT female)

125 Clay Digger

16891 (Recommended) WHIP HOSE ASSEMBLY (univ.+ 1L + 6' hose + 1/2 NPT swivel)

9266 (Optional) WHIP HOSE ASSEMBLY (univ.+ 6' hose + 1/2 NPT swivel)

Paving Breakers

18331 10' 3/4" WHIP HOSE W/2L OILER & UNIVERSAL COUPLINGS

NOTE: For enhanced performance and longer life when using Paving Breakers, APT recommends the 18331 3/4" whip hose with oiler which provides a line oiler within 10' of the operating tool for efficient lubrication.

Now in its eighth decade and going strong, American Pneumatic Tools (APT) is a leading provider of Pneumatic Tools for the Construction and Industrial markets. APT has been synonymous with quality since its beginning in 1938, and meets the most demanding criteria for superior performance and reliability.

WARRANTY

APT warrants its products to the original purchaser to be free from defective materials and workmanship. The liability of APT is limited to the replacement of any part(s) which are judged to be defective in materials and/or workmanship by APT, provided that APT is notified of the suspect part within (2) years after receipt of the product by the original purchaser. Does not include wear items. This warranty entitles the original purchaser to have the warranted parts and labor rendered at no cost, for the period of (2) years when the product is delivered prepaid to the APT facility in Santa Fe Springs, California or an authorized APT warranty repair facility. This warranty does not apply to products which APT judges to have been misused, modified or repaired by parties other than APT personnel or an authorized warranty repair facility. This warranty does not apply to tools that have been improperly maintained by the user or when the malfunction or defect can be attributed to the use of parts that are not genuine APT OEM repair parts. **AUTHORIZATION TO RETURN GOODS** When returning any APT product to the factory or authorized facility for warranty evaluation or for any other reason, the customer must first obtain a RETURN MATERIAL AUTHORIZATION (RMA) number from our customer services department by calling (800) 532-7402 or faxing (562) 204-1773 with information on the return. The RMA number must be prominently displayed on the packages that are returned to the APT facility and also shown on the packaging list. We reserve the right to refuse any returns without prior authorization. A minimum 20% handling and restocking charge will be applied to all returns unless the situation dictates otherwise and prior authorization is obtained with the RMA number.

OILERS

18307 OILER APT OL 1.4 OZ. (extra small)

17755 OILER APT 1L 3.7 OZ. (small)

17756 OILER APT 2L 11.0 OZ. (medium)

17757 OILER APT 3L 16.0 OZ. (large)

18646 OILER APT 2L- CONSTANT FEED FOR ROCK DRILLS

MUFFLERS KITS

6465 MUFFLER KIT for Paving Breaker (Models 117, 118 & 119)

18099 MUFFLER KIT for Paving Breaker (Model 140)

17752 MUFFLER KIT for Paving Breaker (Model 160)

17753 MUFFLER KIT for Paving Breaker (Model 190)

18459 MUFFLER KIT for Rock Drill (Model 155)

LATCH & SIDE ROD KITS

Latch Kit #18295 CLAY & TRENCH DIGGERS MODELS 118, 119 & 125

Latch Kit #18295 PAVING BREAKER MODEL 117

Latch Kit #18301 PAVING BREAKER MODEL 140

Latch Kit #18296 PAVING BREAKERS MODELS 160 & 180/190

Side Rod Kit #18299 PAVING BREAKER MODEL 140

Side Rod Kit #18298 PAVING BREAKERS MODELS 160 & 180

Side Rod Kit #18581 PAVING BREAKER MODEL 190

Rivet Buster Retainer Kit - #18741

20% SAVINGS vs. buying the parts individually!

SAFETY

Important! Before operating any APT air tool, always read the safety instructions which accompany each tool. The most important safety device for any power tool is the operator. Care and good judgement are the best protection against injury. APT is dedicated to producing tools that help the operator work safely and efficiently. Please obey and follow all safety instructions and take time to keep both tools and accessories in good working condition.

Terms and Conditions

Terms: 2% 15, Net 30 days, FOB Santa Fe Springs, California. Minimum Order: \$50.00 net. All orders totaling less than \$50.00 will be invoiced at \$50.00 net. Freight: APT reserves the right to select all carriers. Damaged or Short Shipments: Always inspect and count all shipments being received and note on the packing list any damage or shortage before the driver leaves your facility. Any claim resulting from shipment must be filed immediately with the carrier and reported to APT within 30 days of delivery. Order Desk Hours: Monday thru Friday 6:00 a.m. to 4:00 p.m. Pacific Time



AMERICAN PNEUMATIC TOOLS, INC.

Tools Renewed Inc
800-247-3639 Fax: 860-665-9821
Web: www.toolsrenewed.com