


Multi-purpose Beveling Machine


Bevel, deburr & chamfer edges of steel plate faster and cleaner than angle grinders



One Machine, Three Milling Options

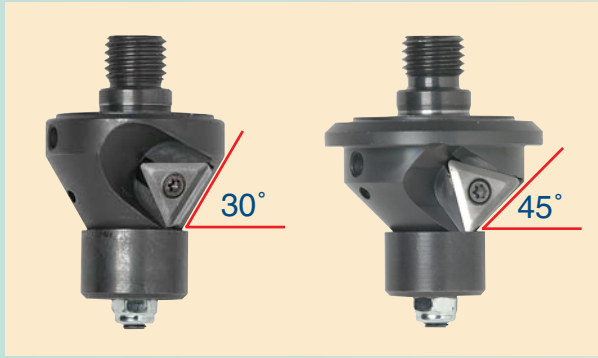

LKF1201 milling head 30° LKF1202 milling head 45°

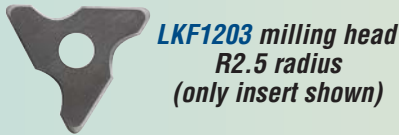

LKF1203 milling head
R2.5 radius
(only insert shown)

Accessories:

LKS20 - Sintered carbide cutting plate for LKF 1201 and LKF1202

LKS20-R - Sintered carbide cutting plate for LKF1203 (shown above)

- Bevel 30° or 45° weld seams on steel, stainless steel, nonferrous metals, brass and plastics
- Deburr and chamfer, straighten edges, internal and external radii and countersink holes from 7/8" dia.
- Fine adjustment feature for slight chamfers when deburring for the preparation of weld seams
- Three milling heads – 30°, 45° and radius R2.5 – are available
- Ideal for the following applications:
 - Moldmaking:** straighten edges, internal and external radii and countersink holes from 7/8" dia.
 - Boiler and process plant construction:** prepare weld seams on heat exchangers
 - Mechanical engineering:** deburr machine parts, chamfer edges to protect against paint peeling and create visible edges
 - Sheet metal:** deburr cut edges
- One-year warranty



Standard equipment includes milling head and 2 inserts, SW22 key, carrying case and user's manual.

Model No.	Beveling Angle	Bevel Width (Max.)*	Motor Power (Amps)	Voltage*	Cutting Speed (SFPM)	Dimensions (L x W x H)	Weight (lbs.)
LKF450-2A	30°	1/4"	10	110V	3000	12 1/4" x 5 1/2" x 11 5/8"	10 1/2
LKF450-2	45°	1/4"	10	110V	3000	12 1/4" x 5 1/2" x 11 5/8"	10 1/2


** All units available in 220 Volt / 50Hz † Max. bevel width may require several passes, depending on material hardness

Portable Beveling Machine

Bevel angles from 15° to 60° on plate and pipes



- Fast and easy preparation of weld seams
- Bevel 15° to 60° angles on plate or pipe
- High-quality performance allows better weld connections
- Continuously adjustable angle (15° to 60°) and land width up to 5/8"
- Ideal for steel, stainless steel, aluminum and nonferrous metals
- Robust design, single operator control and easy handling
- Includes two milling heads and 12 total indexable inserts for fast metal removal and extended tool life

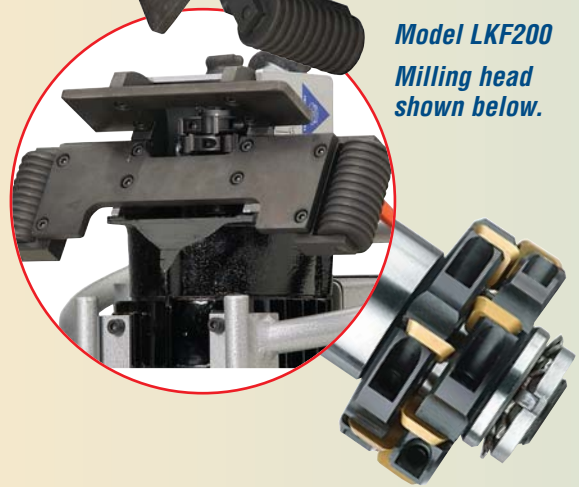

*Model LKF200
Milling head
shown below.*

- Welding angles and weld preparation on pipes/tubes with a minimum OD of 6 1/4" (160mm) with included pipe roller guide
- Ideal for beveling pipe 6 1/4" OD and larger
- Designed for continuous operation
- Smooth roller guides
- One-year warranty



Standard equipment includes two milling heads, each with 6 sintered carbide reversible cutting inserts, tools for assembly, LKF 225 pipe roller guide (shown at left), steel carrying case and user's manual.



Ideal for beveling pipe 6 1/4" OD and larger.

Accessories:

LKS10 - Sintered carbide cutting plates (10 per pack)

Model No.	Adjustable Beveling Angle	Bevel Width (Max.)	Motor Power (Amps)	Voltage*	Rotation Speed (SFPM)	Dimensions (L xH)	Weight (lbs.)
LKF200	15° - 60°	5/8"†	14	110V	1800	16 1/2" x 13"	42

** Available in 220 Volt / 50Hz † Max. bevel width may require several passes, depending on material hardness