SINCE 1938

2024
PRODUCT CATALOG

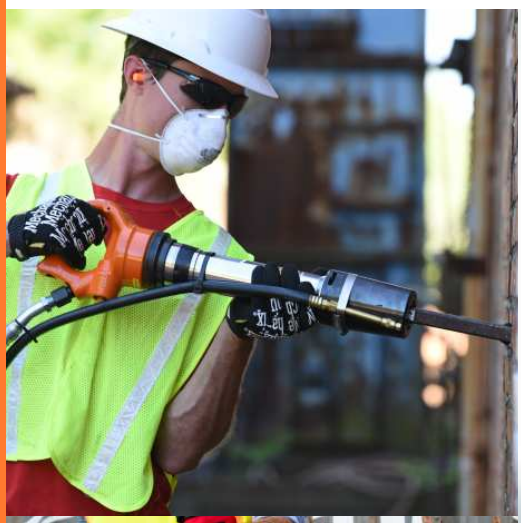

SINCE 1938

PROVEN POWER.
RUGGED RELIABILITY.

SUPPORT AND SERVICE

APT is a leading provider of outstanding tools for the construction and industrial markets. The APT brand has been synonymous with quality since 1938.

For decades, the APT brand has represented quality, performance, and innovation in the pneumatic tool industry. APT's product line offers a complete range of pneumatic tools. Superior performance, excellent product reliability, competitive pricing, ergonomic designs, and a great warranty are what makes APT an industry leader.

The products and parts are made in various countries by APT's affiliates and/or trusted suppliers.

Worldwide Customer Support

Choosing APT is just the beginning. APT distributors offer reliable service and support. Genuine spare parts for your tools are available worldwide, with short delivery times. Refer to website for warranty, terms and conditions, and return policy information.

Order Desk Hours

Monday through Friday | 6:00 a.m. to 4:00 p.m. Pacific Time (U.S. & Canada) | 8:00 - 16:00 UTC

HANDHELD PNEUMATIC

Paving Breakers

mufflers optional

Features

- Drop-forged alloy steel handle
- Built-in automatic oiler
- Rubber handle grips
- Latch-type retainer
- Swivel hose connection
- Standard universal air fitting
- Noise-dampening mufflers available
- Four-bolt backhead
- Replaceable chuck bushing (except for model 140/140A)

MODEL	CHUCK SIZE IN.	BORE IN.	STROKE IN.	BPM	CFM @90PSI	WEIGHT LBS.	LENGTH IN.	AIR INLET NPT
M117	7/8 x 3-1/4 • 1x4-1/4	1-3/4	3-3/8	1,850	34-48	33	21-3/4	3/8" male
M140	1 x 4-1/4	1-7/8	4-1/4	1,500	48	43	21-1/8	1/2" male
M160	1-1/8 x 6 • 1-1/4 x 6	2-1/4	4-1/8	1,680	60-65	68	25-3/4	1/2" male
M190	1-1/8 x 6 • 1-1/4 x 6	2-5/8	6-1/8	1,350	75-80	91	29	3/4" male

*Ball valve used on Models 117, 160, and 190.

Airgo-Line® Paving Breakers

40 lb., 60 lb., 90 lb. classes

mufflers optional

Features

- Ergonomic handle dampens vibration; reduces shock to the operator
- Same hitting power as standard breaker, reduces operator fatigue
- Handle is interchangeable with APT standard model
- Replaceable vibration isolator

MODEL	CHUCK SIZE IN.	BORE IN.	STROKE IN.	BPM	CFM @90PSI	WEIGHT LBS.	LENGTH IN.	AIR INLET NPT
M140A	1 x 4-1/4	1-7/8	4-1/4	1,500	48	46	24	1/2" male
M160A	1-1/8 x 6 • 1-1/4 x 6	2-1/4	4-1/8	1,680	60-65	70	28-1/4	1/2" male
M190A	1-1/8 x 6 • 1-1/4 x 6	2-5/8	6-1/8	1,350	75-80	90	31	3/4" male

Airgo-Line® Backhead Assemblies

M140A assy # 18034	M160A assy # 17684	M190A assy # 17720

Rock Drills

optional mufflers available for 109 & 155

Features

Model 109 - 9 lb. class
- Clockwise rotation
- Stop-rotation feature
- Lightweight cast alum. handle
- Built-in automatic oiler

Model 115 - 15 lb. class
- Stop-rotation feature
- Counterclockwise rotation
- Built-in automatic oiler

Model 115 cont.
- Latch-type retainer
- Lightweight cast alum handle

Model 137 - 30 lb. class
- 4 drilling speeds
- Replaceable piston stem bearing
- Avaliable wet or dry
- Counterclockwise rotation

Model 137 cont.
- Rubber handle grips

Model 155 - 60 lb. class
- 3 drilling speeds
- Replaceable piston stem bearing
- Built-in automatic oiler
- Available wet or dry
- Counterclockwise rotation
- Rubber handle grips

MODEL	CHUCK SIZE IN.	BORE IN.	STROKE IN.	BPM	CFM @90PSI	WEIGHT LBS.	LENGTH IN.	AIR INLET NPT
M109	3/4 X 3-3/4 Round Slotted	1-1/4	1	3,400	19-21	9	15	3/8" female
M115	7/8 x 3-1/4	1-15/16	1-3/8	2,900	32-36	19	18-3/8	3/8" male
M137‡	7/8 x 3-1/4 or 4-1/4 1x4-1/4	2-3/8	2-5/8	2,300	85-90	38	19-3/4	1/2" male
M155	7/8 x 3-1/4 or 4-1/4 1x4-1/4	2-5/8	3	2,100	110-120	61	22-3/4	3/4" male

‡No built-in automatic oiler reservoir - constant feed oiler recommended.

HANDHELD PNEUMATIC

Clay/Trench Diggers

Features

• Deep case-hardened alloy steel cylinders • Replaceable chuck bushing • Latch-type retainer

Model 118 Clay Digger
- Built-in automatic oiler
- D-style handle
- Inside trigger for better control and safety

Model 119 Trench Digger
- Built-in automatic oiler
- T-style forged handle
- Rubber handle grips

Model 125 Clay Digger
- D-style handle
- Inside trigger for better control and safety
- Flapper valved designs allows dirt to pass without stopping tool
- Replaceable chuck and piston stem bushing

MODEL	CHUCK SIZE IN.	BORE IN.	STROKE IN.	BPM	CFM @90PSI	WEIGHT LBS.	LENGTH IN.	AIR INLET NPT
M118	7/8 x 3-1/4 • 1x4-1/4	1-3/4	3-3/8	1,850	34-36	31	21-1/2	3/8" male
M119	7/8 x 3-1/4 • 1x4-1/4	1-3/4	3-3/8	1,500	34-38	37	31	1/2" female
M125	7/8 hex x 3-1/4	2-1/4	4-1/8	1,680	38-42	21	18-3/8	1/2" female

Rivet Busters/Demolition Tools

Features

- New closed-nose cylinder captivates the piston, thus adding an extra layer of safety. Includes traditional retainer system.
- Choice of 3 hand styles:
  - T-handle style with outside trigger
  - Pistol-grip style handle with outside trigger
  - Classic "D" handle with inside trigger
- Three stroke sizes: 6", 8" and 11"
- All models use jumbo extra heavy-duty (11x) steel
- 6' steel-braid reinforced whiphose and air fitting included with every tool

MODEL	CHUCK SIZE IN.	BORE IN.	STROKE IN.	BPM	CFM @90PSI	WEIGHT LBS. W/ RETAINER	LENGTH IN. W/ RETAINER	AIR INLET NPT
M633CN	D Handle	1-3/16	6	1,100	42-46	29	20-1/2	1/2" female
M633CN	Pistol Grip	1-3/16	6	1,100	42-46	28	21	1/2" female
M133CN	D Handle	1-3/16	8	1,140	42-46	32	22-1/2	1/2" female
M133CN	Pistol Grip	1-3/16	8	1,140	42-46	31	23	1/2" female
M1133CN	D Handle	1-3/16	11	850	48-52	35	25-1/2	1/2" female
M1133CN	Pistol Grip	1-3/16	11	850	48-52	34	26	1/2" female
M133CNT	Extended T Handle	1-3/16	8	1,140	42-46	36	32	3/8" male
M1133CNT	Extended T Handle	1-3/16	11	850	48-52	39	35	3/8" male

Chipping Hammers

Features

- Deep case-hardened alloy steel cylinders
- Drop-forged handles
- All models are 7/8" - 24 fine thread
- Replaceable bushing
- Adjustable exhaust deflector
- Price includes oval retainer, locking spring and whiphose assembly - 7/8" - 24 male swivel, 6' steel braid-reinforced whiphose and air fitting

260 & M43/44 Series
- 2-bolt and 4-bolt handle for ease of maintenance
- Patented ball valve design (U.S. pat #8,276,682 B2)
- Forgiving of dirt and debris, corrosion resistant
- Available in 3" and 4" strokes

650 Series
- Flapper valve design allows dirt to pass without stopping the tool
- Traditional pistol grip handle
- Available in 2", 3", 4" strokes

MODEL		BORE IN.	STROKE IN.	BPM	CFM @90PSI	WEIGHT LBS. w/o RETAINER	LENGTH IN. w/o RETAINER	CHUCK BUSHING	AIR INLET
650 SERIES	M652	1-1/8	2	2,100	32-34	12	13-1/4	.680 Round or .580 Hex	7/8-24
	M653	1-1/8	3	1,650	33-35	14	15-1/4	.680 Round or .580 Hex	7/8-24
	M654	1-1/8	4	1,375	34-36	16	16	.680 Round or .580 Hex	7/8-24
260 SERIES 2-BOLT	M263	1-1/8	3	1,650	33-35	14	14-9/16	.680 Round or .580 Hex	7/8-24
	M264	1-1/8	4	1,375	34-36	15	15-9/16	.680 Round or .580 Hex	7/8-24
M43/ M44 SERIES	M43	1-1/8	3	1,650	33-35	21	16-3/4	.680 Round or .580 Hex	7/8-24
	M44	1-1/8	4	1,375	34-36	22	17-3/4	.680 Round or .580 Hex	7/8-24

Part #	Retainers
9431	Standard oval retainer (7022 with 1941 spring)
5550	Quick change/ball retainer w/ 1941 spring - optional
18290	Bolt-on quick change/ball retainer - optional

Backfill Tamper

Features

- Built-in large automatic oiler
- Flapper valve design allows dirt to pass without stopping the tool
- Internally reinforced large malleable 6" iron butt (standard)
- Pole butt (half-moon), and 3" diameter butt available

131

MODEL	BORE IN.	STROKE IN.	BPM	CFM @90PSI	WEIGHT LBS.	LENGTH IN.	AIR INLET NPT
M131	1-1/2	5-1/2	670	38-42	37	51-7/8	1/2 Female

Needle Scalers

Model 307/317
- Rubber-faced throttle valve for positive seal
- Lever-type throttle for easy control
- Alloy steel cylinder
- Assembly of 19 seven-inch steel needles, with attachment housing
- Optional chisel accessories sold separately (3 included in M317 kit)

MODEL	BPM	CFM @90PSI	WEIGHT LBS.	LENGTH IN.	AIR INLET NPT
M307/217	4,000	7	6.7	18-1/2	1/4 Female
M121	4,500	5.5	4	11-3/4	1/4 Male

M307 power unit with anvil (included)

M307
7" needles and housing (included)

M317 chisels
(included in M317 kit, or sold separately)

Model 121
Mini Needle Scaler

Model 317 Kit
- M307 power unit
- 7" needle assembly with housing
- 3 chisels
- Carrying case

Retrofit Dust Suppression Spray Kit

- 36" retrofit kit that can be attached to any size tool (Breakers, Rivet Busters, and Chipping Hammers)
- Equipped with 6 GPH atomized water (or mist) nozzle that can cover 80 degree cone around the tool at 40 psi
- Connects to garden hose making it simple to utilize any water source on the job site
- Part no. 9753300015

Air Tool Accessories

(R) = Recommended (O) = Optional (S) = Standard

Needle Scalers
18743 **(R)** WHIPHOSE ASSY (UF, OL, 3/8" Hose x 6ft, 1/4" NPT Male)

Rivet Busters
18837 **(R)** WHIPHOSE ASSY (UF, 2L, 1/2" Braided Hose x 6ft, 1/2" NPT Swivel)
18836 **(O)** WHIPHOSE ASSY (UF, 1L, 1/2" Braided Hose x 6ft, 1/2" NPT Swivel)
18833 **(O)** WHIPHOSE ASSY (UF, 1/2" Braided Hose x 6ft, 1/2" NPT Swivel)
18842 **(R)** WHIPHOSE ASSY (UF, 1L, Braided Hose x 6ft, 3/8: Female)
18840 **(O)** WHIPHOSE ASSY (UF, 1/2" Braided Hose x 6ft, 3/8" NPT Female)

Chipping Hammers
18835 **(S)** WHIPHOSE ASSY (UF, 1L, 1/2" Braided Hose x 6ft, with 7/8"-24 Swivel)
18832 **(S)** WHIPHOSE ASSY (UF, 1/2" Braided Hose x 6ft, with 7/8"-24 Swivel)
18833 (Old-Style-Coarse Thread) WHIPHOSE ASSY (UF, 1/2" Braided Hose x 6ft, with 1/2" NPT Swivel)

109 Rock Drill
18841 **(R)** WHIPHOSE ASSY (UF, 1L, 1/2" Braided Hose x 6ft, 3/8" NPT Male)
18839 **(O)** WHIPHOSE ASSY (UF, 1/2" Braided Hose x 6ft, 3/8" NPT Male)

115 Rock Drill
18842 **(R)** WHIPHOSE ASSY (UF, 1L, 1/2" Braided Hose x 6ft, 3/8" NPT Female)
18840 **(O)** WHIPHOSE ASSY (UF, 1/2" Braided Hose x 6ft, 3/8" NPT Female)

131 Backfill Tamper
18838 **(R)** WHIPHOSE ASSY (UF, 2L, 1/2" Braided Hose x 6ft, 1/2" NPT Male)
18834 **(O)** WHIPHOSE ASSY (UF,1/2" Braided Hose x 6ft, 1/2" NPT Male)

117 Paving Breaker
18842 **(R)** WHIPHOSE ASSY (UF, 1L, 1/2" Braided Hose x 6ft, 3/8" NPT Female)
18840 **(O)** WHIPHOSE ASSY (UF, 1/2" Braided Hose x 6ft, 3/8" NPT Female)

119 Trench Digger
18838 **(R)** WHIPHOSE ASSY (UF, 2L, 1/2" Braided Hose x 6ft, 1/2" NPT Male)
18834 **(O)** WHIPHOSE ASSY (UF, 1/2" Braided Hose x 6ft, 1/2" NPT Male)

118 Clay Digger
18842 **(R)** WHIPHOSE ASSY (UF, 2L 1/2" Braided Hose x 6ft, 1/2" NPT Swivel)
18840 **(O)** WHIPHOSE ASSY (UF, 2L 1/2" Braided Hose x 6ft, 1/2" NPT Swivel)

125 Clay Digger
18837 **(R)** WHIPHOSE ASSY (UF, 1L, 1/2" Braided Hose x 6ft, 3/8" NPT Female)
18834 **(O)** WHIPHOSE ASSY (UF, 1/2" Braided Hose x 6ft, 3/8" NPT Female)

Whiphose for 137 & 155 Rock Drill
19058 8' WHIPHOSE ASSY 3/4" HOSE, CONSTANT-FEED OILER & (2) UNIVERSAL COUPLINGS

Whiphose for 190 Paving Breaker
19059 8' 3/4" WHIPHOSE W/2L OILER & UNIVERSAL COUPLINGS

NOTE: For enhanced performance and longer life when using Paving Breakers, APT recommends the 18331 3/4" whiphose with oiler, which provides an inline oiler within 10' of the operating tool for efficient lubrication.

Safety Cables
18754 Hose to Hose
18755 Hose to Tool

Universal Couplings
18503 3/8" NPT Male
17193 3/8" NPT Female
18504 1/2" NPT Male
17194 1/2" NPT Female
18291 3/4" NPT Male
17195 3/4" NPT Female

O-Ring Seal & Repair Kits
18774 (M117)
18775 (M140)
18776 (M140A)
18777 (M160)
18778 (M160A)
18779 (M180, M190)
18780 (M180A, M190A)
18781 (M109)
18782 (M115)
18783 (M137)
18784 (M155)
18785 (M633, M133, M1133)
18786 (M263, M264)
18787 (M652, M653, M654)
18788 (M118)
18789 (M119)
18790 (M125)
18791 (M131)
18793 (M307 Scaler, M317 Scaler Kit)

APT Oilers
18307 OL 1.4 OZ. (X small) - 1/2 NPT
17755 1L 3.7 OZ. (small) - 3/4 NPT
17756 2L 11.0 OZ. (med) - 3/4 NPT
17757 3L 16.0 OZ. (large) - 1/2 NPT
18646 2L- Constant Feed (Rock Drill use only) - 3/4 NPT

Muffler Kits
6465 (M117, M118, M119)
18099 (M140)
17752 (M160)
17753 (M190)
18756 (M155)

Side Rod Kits & Latch Kits
18299 Side Rod Kit (M140)
18298 Side Rod Kit (M160, M180)
18581 Side Rod Kit (M190)
18796 Side Rod Kit (M109)
18797 Side Rod Kit (M115)
18798 Side Rod Kit (M137)
18799 Side Rod Kit (M155)

18794 Latch Kit (M115)
18295 Latch Kit (M117, M118, M118, M125)
18301 Latch Kit (M140)
18296 Latch Kit (M160, M180, M190)

18741 Standard Rivet Buster Kit (with black bumper) M633, M133, M1133

18826 Optional Rivet Buster Kit (with orange bumper) M633, M133, M1133

Notes:

AMERICAN PNEUMATIC TOOLS
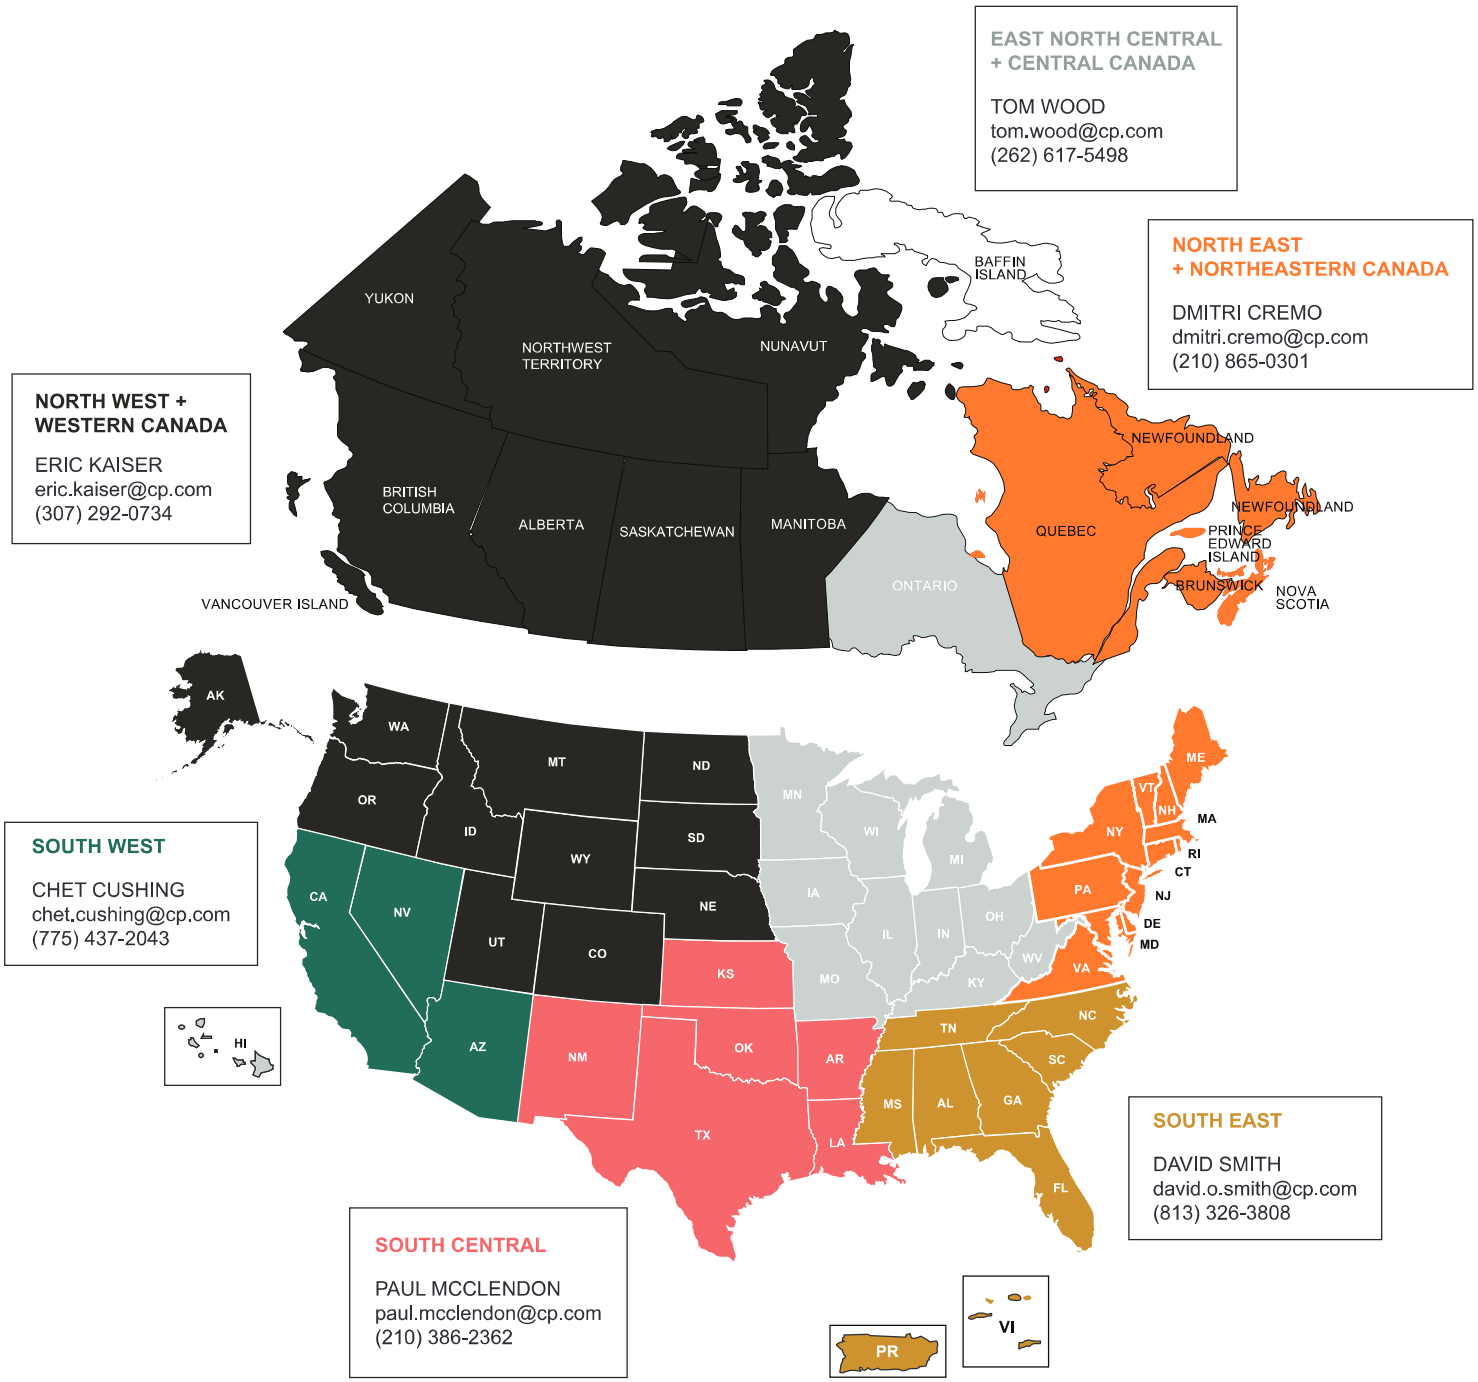
RSM Territory Map